

Acorp M56PIS (Conexant HSFI)

Quick Installation Guide

Features


- Modem (Software Modem)
- ITU 56K V.92.V.90 Standard
- PCI V2.1 compliant
- Windows 98/ME/2000/XP compatible
- Software upgradeable

Package Contents


- Internal modem card
- User's manual
- Driver and Application Software (CD-ROM)
- Phone Cord

Hardware Installation

1. Remove the computer's case.
2. Insert the modem card into a spare PCI expansion slot.
3. Close the case.
4. Unplug the telephone from the wall socket, then plug the telephone into the socket on the back of the modem marked PHONE.
5. Plug the phone cord supplied into the socket on the back of the modem marked LINE.
6. Plug the other end of the cord into the wall socket.
7. Proceed to Software installation.

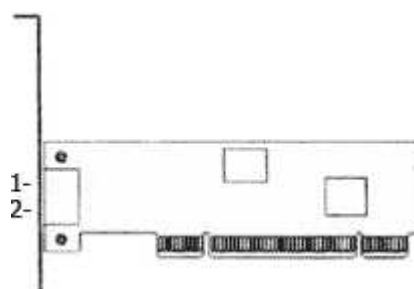

1 — Phone
2 — line

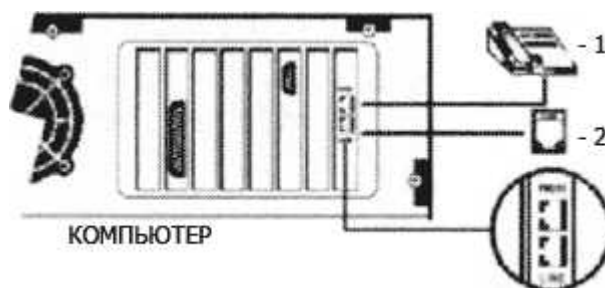

1 — Phone
2 - Line

Installation for Win98SE/ME/2000/XP

1. The message of **PCI Communication Device** will appear. However it may vary with the type of your mother board. Please insert the driver CD supplied and click **Cancel**.
2. Please insert the driver CD supplied. Then click **Driver Install** icon. The software driver will be automatically installed into your Hard Disk.
3. After finished. It will show «**Driver install OK**».

Select Country

Win98SE/ME

1. Move your cursor as following sequence **Start\Settings\Control Panel** and click **Control Panel**. Then double-click on the **Modem** icon.
2. Click **General** tab and select **PCI SoftV92 Modem**, then click **Dialing Properties**.
3. Select country from the list, then click **Apply**.
4. Click «**OK**» to complete the procedure.

Win2000/XP

1. Please choose **Start**. Then click **Control Panel** located on System Tasks item. Then double-click on the **Phone and Modem Options** icon.
2. Click **Dialing Rules** tab and select **My Location**, then click **Edit**.
3. Select Country from the list, then Click **Apply**.

Diagnostic

Win98SE/ME

1. Move your cursor as following sequence **Start \ Settings \ Control Panel** and click **Control Panel**. Then double-click on the **Modems** icon.
2. To test the modem by clicking on the **Diagnostics** tab. Select the **COM Port** that the modem is setting, and clicks **More Info...**
3. If your modem is responding to AT commands and functioning correctly, it means that your modem is working properly. Click **OK** to end this procedure.
4. Click **OK**.

Win2000/XP

1. Move your cursor as following sequence **Start \ Settings \ Control Panel** and click **Control Panel**. Then double-click on the **Phone and Modem Options** icon.
2. Click on the **Modems** tab, then select **PCI SoftV92 Modem** and click **Properties**.
3. Click **Diagnostics** tab. To test the modem by clicking **Query Modem**.
4. If your modem is responding to AT commands and functioning correctly, it means that your modem is working properly. Click **OK** to end this procedure.

Uninstallation for Win98SE/ME/2000/XP

1. Move your cursor as following sequence **Start \ Settings \ Control Panel** and click **Control Panel**. Then double-click on the **Add/Remove Programs** icon.
2. Select **PCI SoftV92 Modem** from the list and then click the **Add/Remove...** button.
3. Click **Yes**.
4. Select **Yes, I want to restart my computer now**. Then Click **Finish**.